ENCP 3.2

AUTO START GENERATOR CONTROL SYSTEM

Discover more at electronil.com/encp_3.2



Image for Illustrations Purposes Only, Your Actual Product May Vary

Specification Sheet

ELECTRONIL CONTROL PANEL SERIES 3 GENSET

ENCP 3.2 Auto & Manual Start Genset Controls



PRODUCT DESCRIPTION

The ENCP 3 Series combines engine and generator controls and monitoring with a single, robust panel for quick access to engine and generator controls, diagnostics, and operating information.

The ENCP 3.2 Generator Control System is suitable for a wide variety of single, diesel or gas, gen-set applications.

Monitoring an extensive number of engine parameters, the system will display warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LEDs and remote PC.


The ENCP 3.2 include USB connection and dedicated terminals for system expansion.

The ENCP 3.2 is compatible with electronic (CAN) and non-electronic (magnetic pick-up/alternator sensing) engines and offer an extensive number of flexible inputs, outputs and extensive engine protections so the system can be easily adapted to meet the most demanding industry requirements.

The extensive list of features includes enhanced event and performance monitoring, remote communications & PLC functionality.

The system can be easily configured using the Configuration Suite PC software. Selected front panel editing is also available.

APPLICATION OVERVIEW

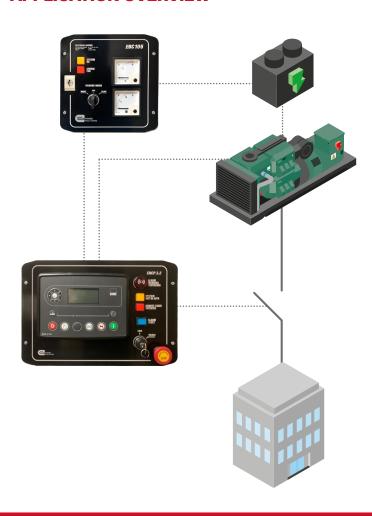





ELECTRONIL CONTROL PANEL SERIES 3 GENSET

ENCP 3.2 Auto & Manual Start Genset Controls

Specification Sheet

PRODUCT KEY FEATURES

- 4-line back-lit LCD text display
- Multiple display languages
- Five-key menu navigation
- LCD alarm indication
- Data logging facility
- Internal PLC editor
- Protections disable feature
- Fully configurable via PC using USB communications
- Front panel configuration with PIN protection
- Power-save mode
- 3-phase generator sensing and protection
- Generator current & power monitoring (kW, kVAr, kVA, pf)
- kW overload alarm
- Over current protection
- Breaker control via fascia buttons
- Fuel and start outputs configurable when using CAN
- (6) configurable DC outputs
- (4) configurable analogue/digital inputs
- (8) configurable digital inputs
- Support for 0 V to 10 V & 4 mA to 20 mA sensors
- CAN, MPU and alternator frequency speed sensing in one variant
- Real time clock
- Manual and automatic fuel pump control
- Engine pre-heat and post-heat functions
- Engine run-time scheduler
- Engine idle control for starting & stopping
- Fuel level alarms
- (3) configurable maintenance alarms
- Compatible with a wide range of CAN engines, including Tier 4engine support
- IP65 rating (with optional gasket) offers increased resistance to water ingress
- Configurable CAN read &transmitted information.
- (1) alternative configuration.

PRODUCT KEY BENEFITS

- Hour's counter provides accurate information for monitoring and maintenance periods.
- User-friendly set-up and button layout for ease of use.
- Multiple parameters are monitored& displayed simultaneously for full visibility.
- The system can be configured to suit a wide range of applications for user flexibility.
- PLC editor allows user configurable functions to meet user specific application requirements.

OPERATOR INTERFACE

- 4-Line Backlit LCD Text Display.
- LED Status Indicators for Modes of Operation.
- LED for Genset Ready Indication.
- LED Indicator for Loading Status.
- Five Key Menu Navigation Keypad.
- Deferent Modes of Operation (Stop/Manual/Auto).
- Alarm Silence/Lamp Test Buttons.
- Manual Start Button (Active in Manual Mode Only).
- Load Switching Buttons.
- Alarm Horn with Audible/Flash Indicators.
- Warning Indicator for Not in Auto Mode.
- Warning indicator for Remote Start.
- Alarm Reset Pushbutton.
- · Genset Lock Key Switch.
- Latching Mushroom Head Emergency Stop (Twist to Release).

OPERATOR INTERFACE DIMENSIONS

